



1 / 5

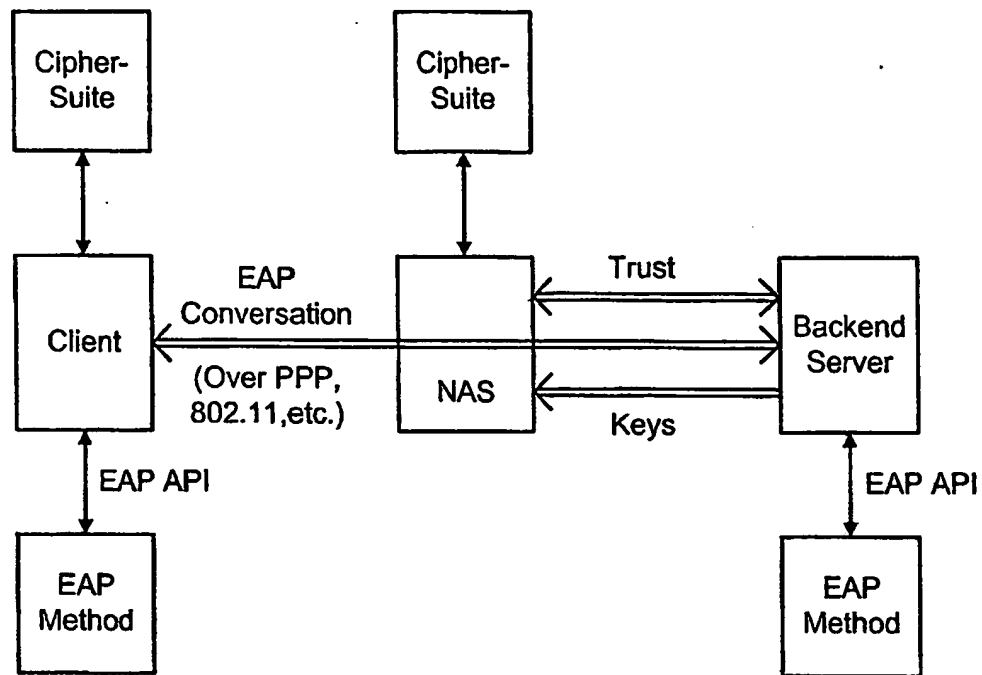

Relationship between EAP client, backend authentication server and NAS in PEAP

FIG. 1

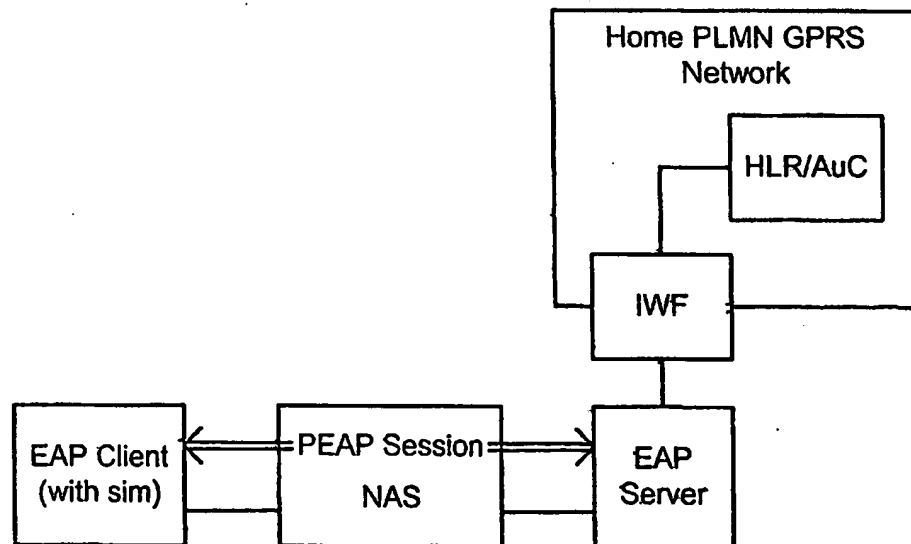


EAP SIM GMM Authentication: Architecture Overview

FIG. 2


BEST AVAILABLE COPY

2 / 5

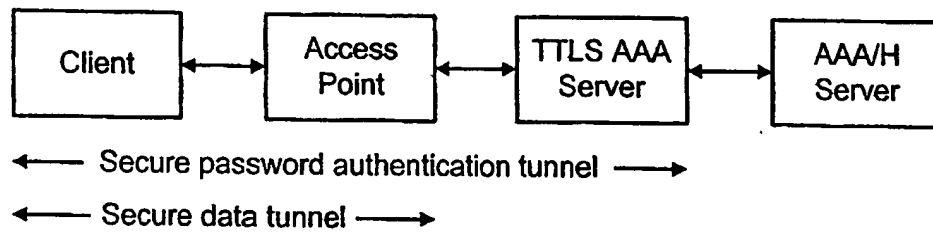

The network architectural model for EAP-TTLS

FIG. 3

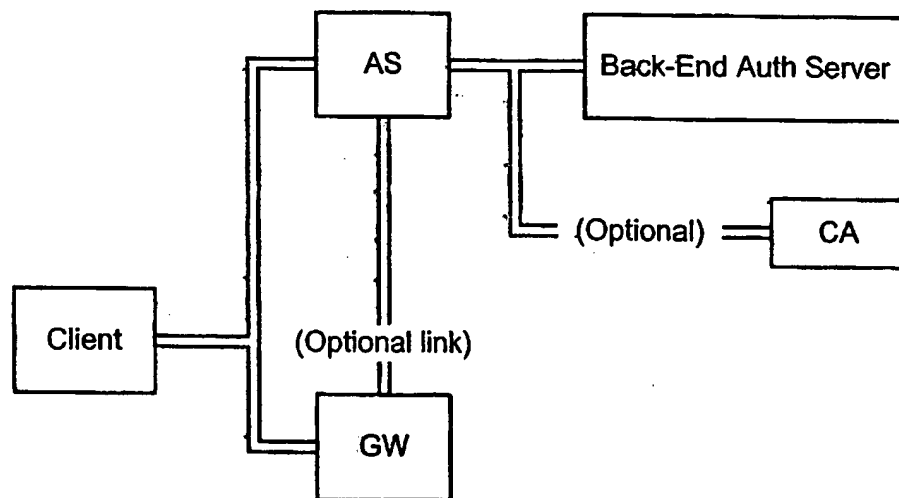

Relations between the PIC entities

FIG. 4

BEST AVAILABLE COPY

3 / 5

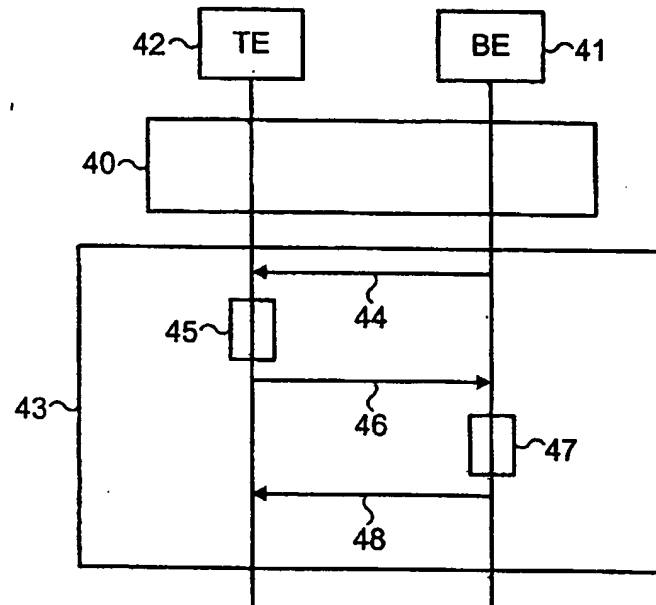


FIG. 5

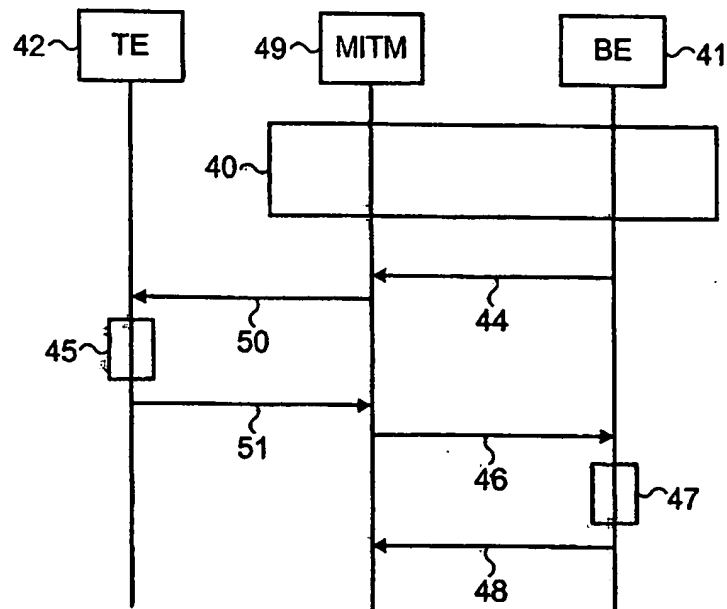


FIG. 6

BEST AVAILABLE COPY

4 / 5

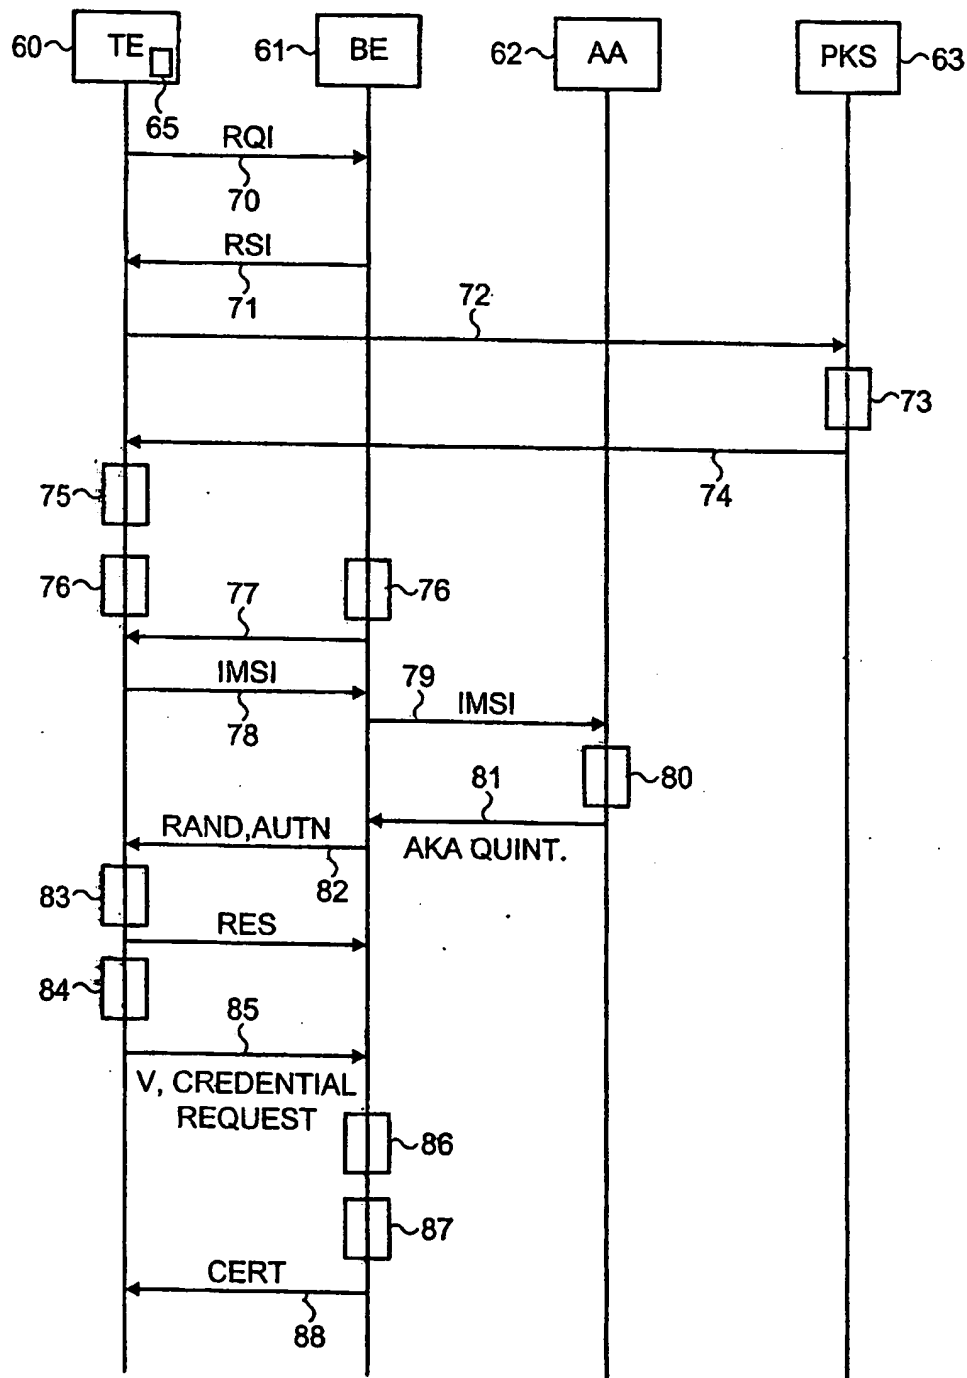


FIG. 7

BEST AVAILABLE COPY

5 / 5

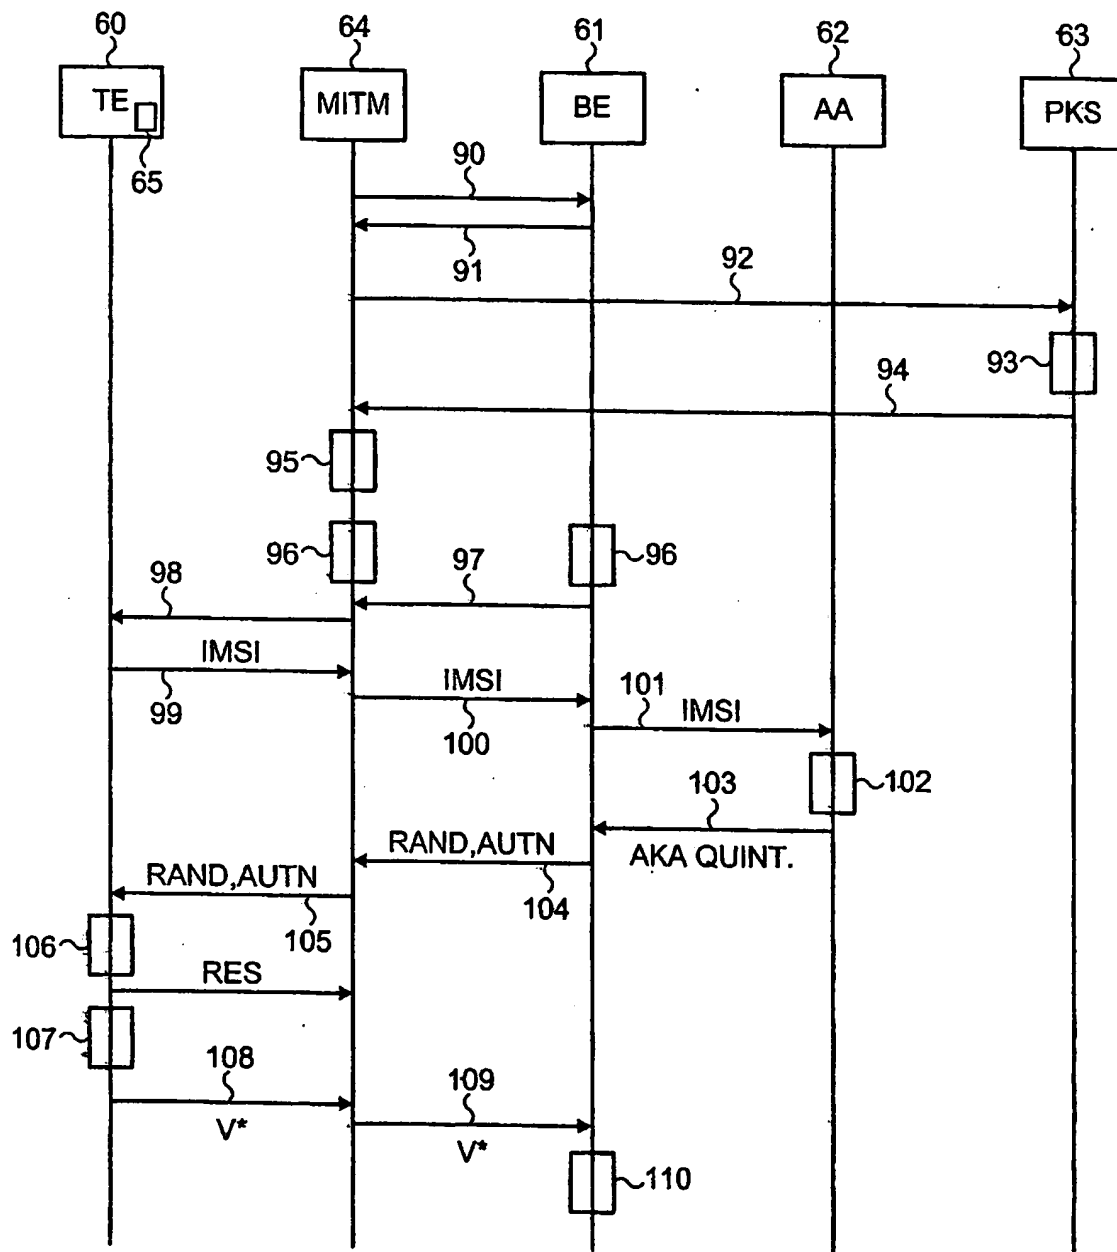


FIG. 8